




# RAA Bearing Trading Co., Ltd.

## SX011814 Robotic high rigidity Crossed Roller Bearing Manufacture China

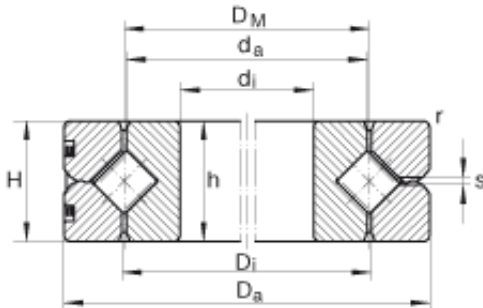

SX011814 Bearing 2D drawings and 3D CAD models

Bearing No. SX011814

Size	70x90x10 mm
Bore Diameter	70 mm
Outer Diameter	90 mm
Width	10 mm
$d_i$ - 70 mm / Tolerance: K6+0,004 / -0,015	70 mm / Tolerance: K6+0,004 / 0,015
$D_a$ - 90 mm / Tolerance: h6 -0,022	90 mm / Tolerance: h6 0,022
H - 10 mm / Tolerance: +/-0,10	10 mm / Tolerance: +/-0,10
$D_i$	80,5 mm
$D_M$	80 mm
$d_a$	79,5 mm
h - 10 mm / Tolerance: E8 -0,01	10 mm / Tolerance: E8 0,01
$r_{min}$	0,6 mm
S	1,2 mm
m	0,3 kg / Weight
	0,010 mm / Running accuracy, radial
	0,010 mm / Running accuracy, axial
$S_{r min}$	0,003 mm / Min. radial bearing clearance
$S_{r max}$	0,015 mm / Max. radial bearing clearance
$S_{k min}$	0,006 mm / Min. axial tilting clearance



## RAA Bearing Trading Co., Ltd.

$S_{k \max}$	0,03 mm / Max. axial tilting clearance
$RLO_{\max}$	0,003 mm / Low clearance: Radial clearance
$RLO_{\max}$	0,006 mm / Low clearance: Preload
$VSP_{\min}$	0,003 mm / Min. bearing preload
$VSP_{\max}$	0,015 mm / Max. bearing preload
$C_a$	15400 N / Dynamic load rating (axial)
$C_{0a}$	51000 N / Static load rating (axial)
$C_r$	11000 N / Dynamic load rating (radial) (for radial load only)
$C_{0r}$	20400 N / Static load rating (radial) (for radial load only)
$n_{G \text{ Oil}}$	1910 1/min / Limiting speed for oil lubrication with normal clearance
$n_{G \text{ Fett}}$	955 1/min / Limiting speed for grease lubrication with normal clearance
$n_{G \text{ Oil}}$	955 1/min / Limiting speed for oil lubrication with preload
Category	Ball Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.275
EAN	4047643190541
Product Group	B00234